

2009-2015 Raptor/F150 Lowrance Elite FS7 GPS Mount Installation

1. Remove the dash tray from the vehicle. Remove the 2 screws towards the front of the dash tray using a phillips screwdriver, lift, and slide forward. Make sure to disconnect the speaker connection if the vehicle is equipped with the premium sound system.

2. Once the dash tray is removed place the GPS base mount onto the dash tray and use 2 socket head cap screws to align the base with the factory screw holes. Mark 2 holes on the front of the tray using a sharpie.



3. Drill the 2 holes to 17/64" diameter.



4. Install the base plate using 2 x 1/4" .875" long socket head cap screws and washers. Flip the dash tray and install the reinforcement plate using 2 washers and 2 nylock nuts. Leave nuts loose.



Continued on next page.

2016+ Raptor/F150 Lowrance Elite FS7 GPS Mount Installation


5. Install the 2 aluminum spacers into the factory tray screw pockets. Tighten up the 1/4" socket head screws to hold the assembly together.



6. Install the top swivel plate, plastic washer (bearing), and locking lever using existing hardware.



6. Install the billet side plates using the 1/4"x.750" long socket head cap screws, washers, and nylock nuts. Leave loose to allow for adjustment.

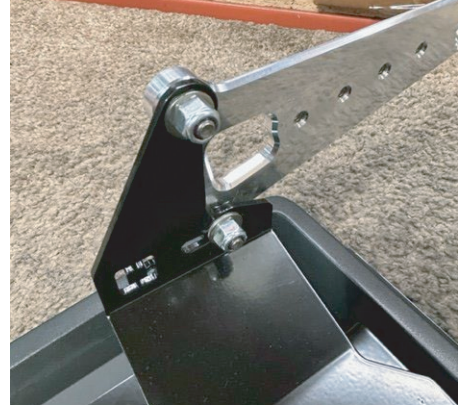

8. Install the complete assembly into the vehicle using the provided phillips head screws. Install the GPS head unit and adjust the height to your liking.



TOOLS NEEDED

Phillips Screwdriver (short)
7/16" open end wrench
3/16" allen wrench or driver
17/64" drill bits

[e. sales@Innov8Racing.com](mailto:sales@Innov8Racing.com)

w. Innov8racing.com

i. Innov8_Racing_inc